


RANGE 42

RANGE 41

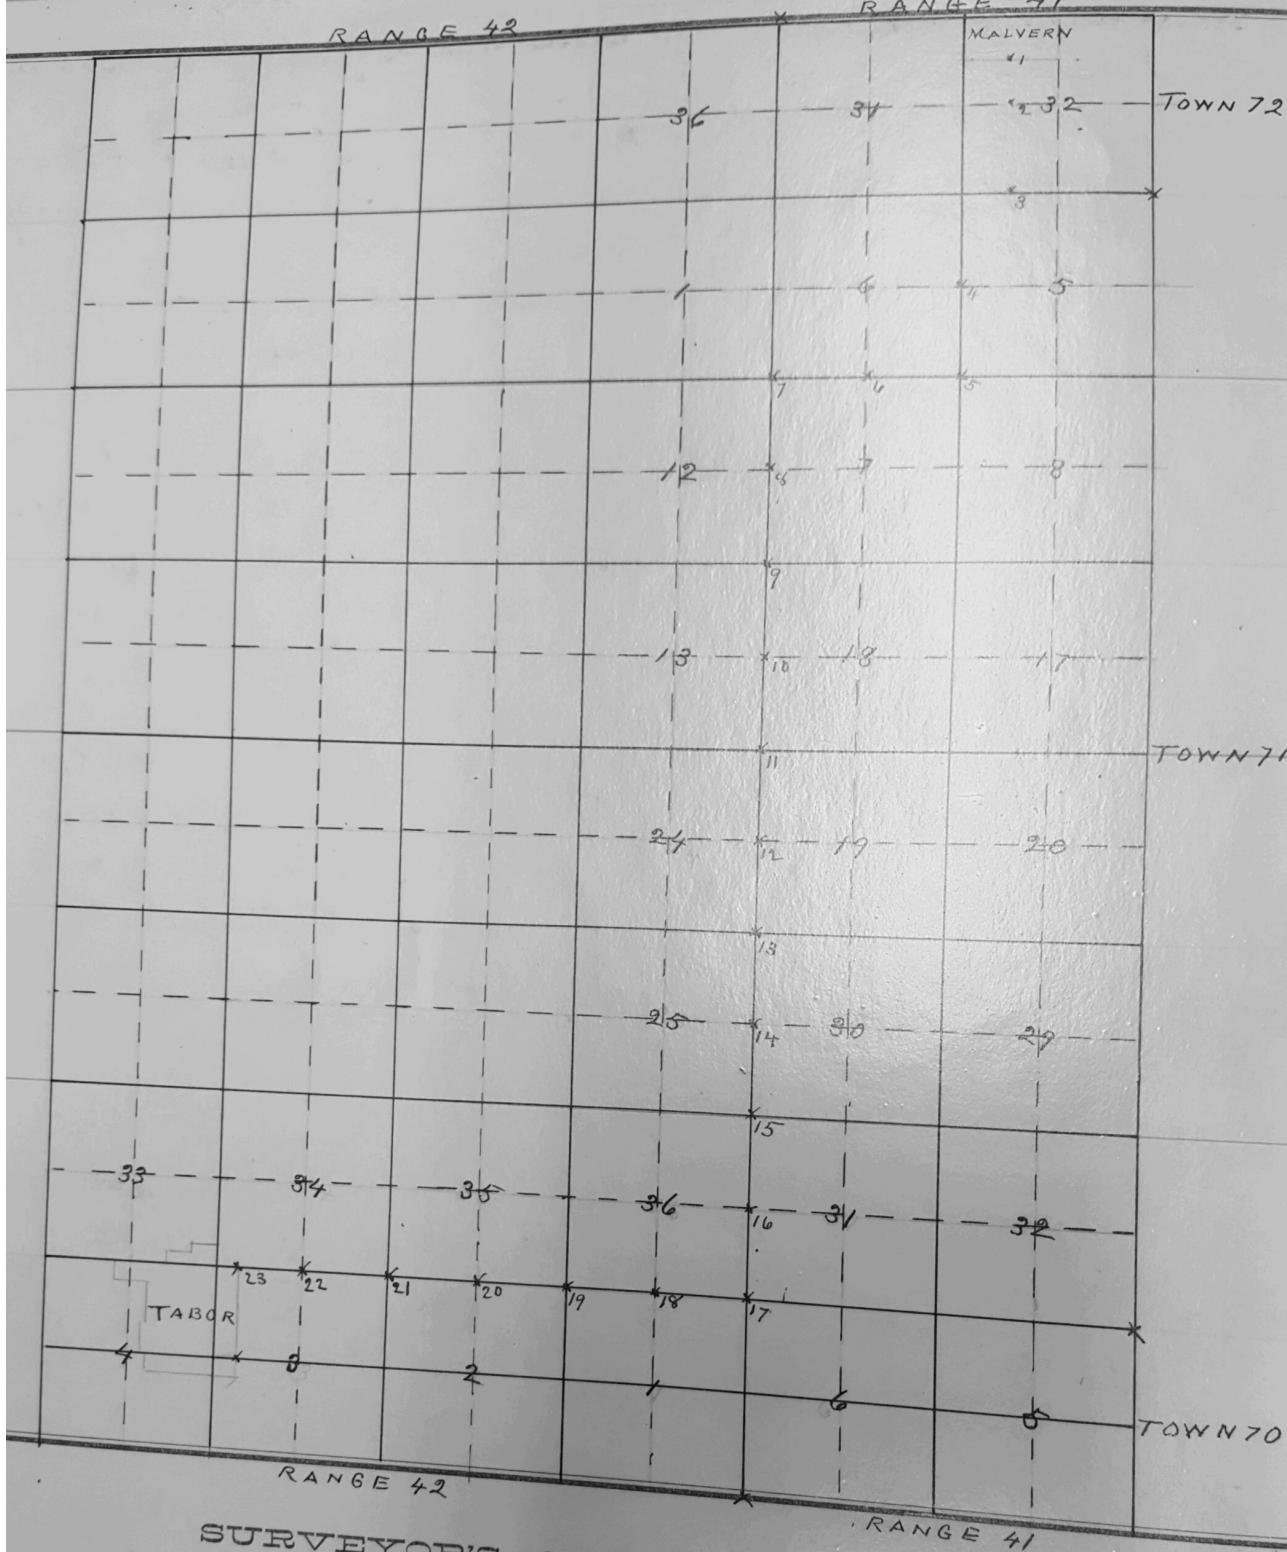

SURVEYOR'S CERTIFICATE.

I hereby certify that, Commencing on the 12th and ending on the 25th day to be made for the Iowa Service Company, a Public Corporation Land Surveyor of the state of Iowa, and then in my employ, at the intersection of the center line of Fourth Avenue in the town of Malverne half of the Northwest quarter of Section 32 Township 72 Range 41, thence southerly through the south $\frac{3}{4}$ of the west $\frac{1}{2}$ of Section 32 and on 5, Township 71, Range 41. Thence south between sections 5 and 6, sections 6 and 7 one mile, to the line between Ranges 41 and 42. Thence the south east corner of section 36-71-42, thence west on the line between eighths miles, to the east corporation line in at the

RANGE 42

RANGE 41

SURVEYOR'S CERTIFICATE.

State of Iowa } ss
Pills County } I hereby certify that, Commencing on the 12th and ending on the 25th August
1925, I caused a survey to be made for the Iowa Service Company, (a public Corporation,) by J. W.
Bonebrake a Registered Land Surveyor of the State of Iowa, and then in my employ.

Commencing at the intersection of the center line of Fourth Avenue in the town of Malvern, with
the north line of the south half of the northwest quarter of section 32 Township 72 Range 41, in Pills
County, Iowa, running thence southerly through the south $\frac{3}{4}$ of the west $\frac{1}{2}$ of section 32 and the west
 $\frac{1}{4}$ of northeast $\frac{1}{4}$ of section 5, Township 71, Range 41, thence south between sections 5 and 6 one-half
mile, thence west between sections 6 and 7 one mile, to the line between Ranges 41 and 42, thence south on
said line five miles to the south east corner of sections 36-71-42, thence west on the line between down-
ships 70 and 71 two and seven eighths miles, to the east corporation line of the Town of Tabor.

At this time he locates the line of the public roads and permanently marked the corners in the
land surveys as shown in detail on the above map, using for the purpose of proper identification
of such lines and corners a certified copy of the original U.S. field notes, together with notes of subse-
quent surveys made by County Surveyors, and I further certify that the lines and corners marked
by him on the ground are correctly located in accordance therewith and that this map of the lines,
figures and letters shown thereon, together with this certificate constitute a correct and complete
return of said survey.

witness my hand at Almwood, Iowa, this 14th 1925.

John D. Seem


Registered Land Surveyor,
State of Iowa.

(Seal)

SURVEYOR'S RECORD, MILLS COUNTY, IOWA.

Section No. 5 Township No. 71 Range No. 41

CMAE & CO., MAKERS, Burlington.

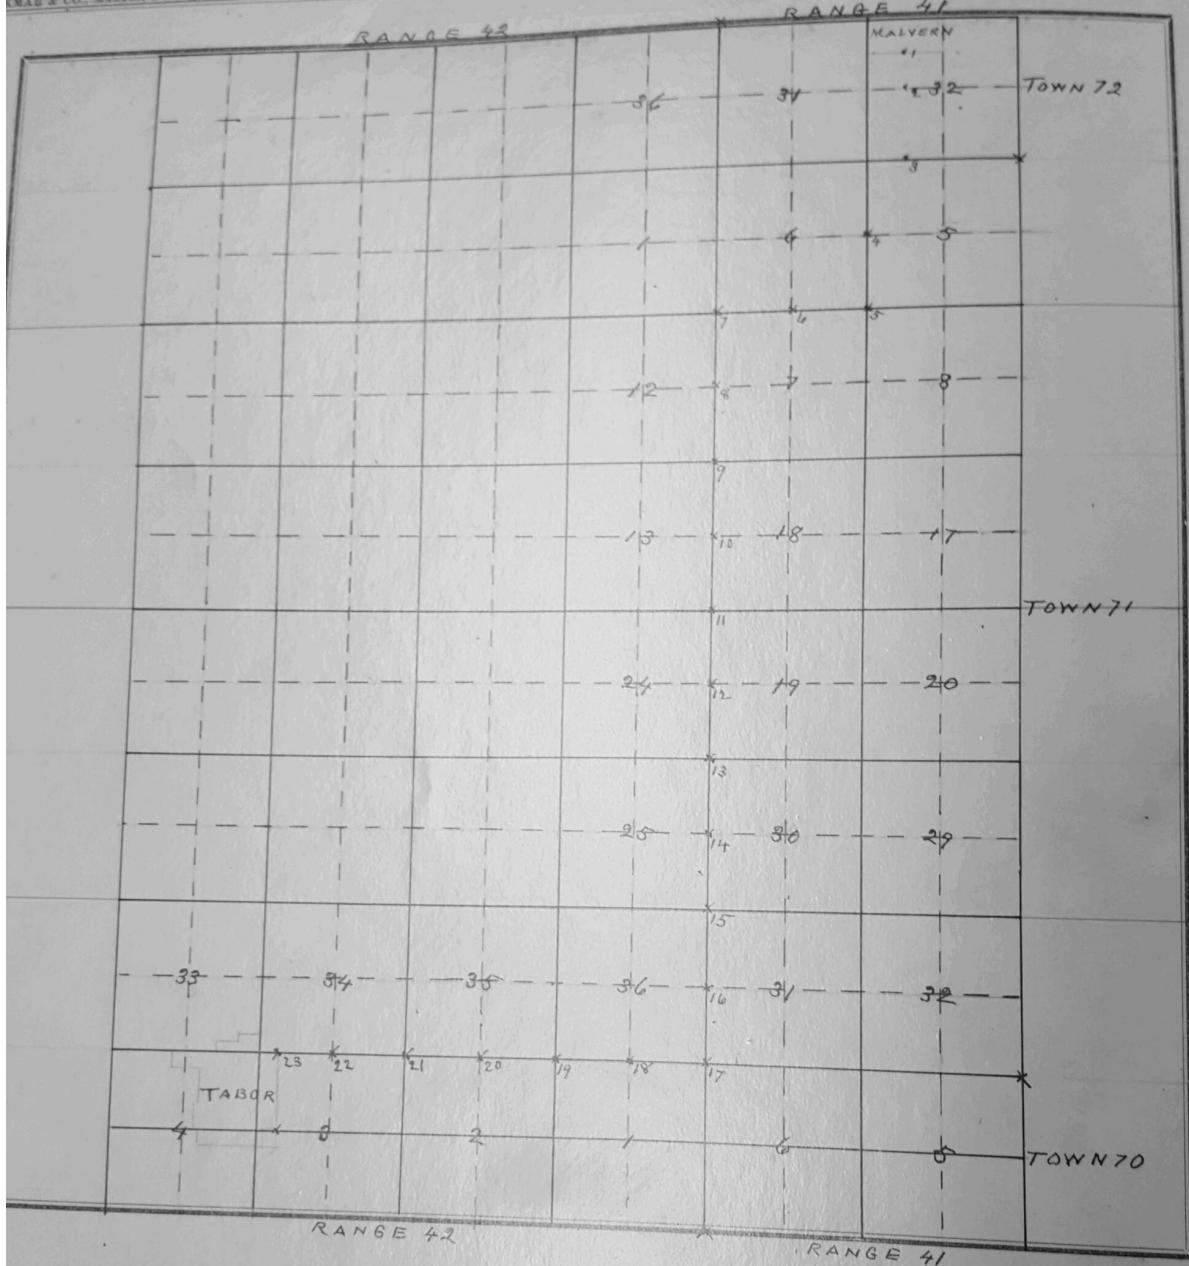

SURVEYOR'S CERTIFICATE.

I hereby certify that, Commencing on the 12th and ending on the 25th of August
Survey to be made for the Iowa Service Company, (a Public Corporation,) by J. L.
and Surveyor of the state of Iowa, and then in my employ.
the intersection of the center line of Fourth Avenue in the town of Malvern, in
the south half of the northwest quarter of section 32 Township 72 Range 41, in Mill
ing thence southerly through the south $\frac{3}{4}$ of the west $\frac{1}{2}$ of section 32 and the west
section 5, Township 71, Range 41, thence south between sections 5 and 6 one-ha
lf section 6 and $\frac{1}{2}$ one mile, to the line between Ranges 41 and 42, thence south
is to the south east corner of section 36-71-42, thence west on the line between sections
and seven eighths miles, to the east corporation line of the Town of Tabor.
cated the line of the public roads and permanently marked the corners in the
own in detail on the above map, using for the purpose of proper identification
owners a certified copy of the original U.S. Field notes, together with notes or su
le by County Surveyors, and I further certify that the same are correct to the best
of my knowledge and belief.

FIELD NOTES

Description of monuments marking corners in the land surveys along the section and other lines shown on the map on the preceding page.

No 1 Intersection of center line 4" Avenue in Mahuron - with N line S $\frac{1}{4}$ NW $\frac{1}{4}$ Sect 32 - 72 - 41 = Limestone = ties = Bur Oak 18" S E 21,7 feet = Bur Oak 20" N E 20,7 feet = Bur Oak 24" W. 98 feet.

No 2 SW corner S E 1/4 S W 1/4 Sect 32 - 72 - 41 = Limestone = ties = Corner fence N E 33,4 feet = Corner fence W E 54,5 feet -

No 3 SW corner S E 1/4 S W 1/4 Sect 32 - 72 - 41 = Limestone = ties = Corner fence N E 33,4 feet = Corner fence W E 54,5 feet -

No 4 = 1/4 Section corner between Sects 5 and 6 - S 71 R 41 = Limestone = ties = Post & 31 feet; 89 gate post 834,7 feet.

No 5 = Corner to Sects 5-6-7-8 - S 71 R 41 = Limestone = ties = Ranch wall bridge S S = 25,7 feet, Ranch wall bridge S N 23,1 feet -

No 6 1/4 Sect. Corner between Sects 6 and 7 = S 71 R 41 corner not located,

No 7 corner to Sect 6-7 S 71 R 42 = Limestone = ties = Maple 24" N W 53,8 feet {Corner fence S E 44,4 feet, Corner fence S W 42,2 feet, N W 32,3 feet = N gal post 8 30,7 feet,

No 8 = 1/4 Sect. Corner between Sects 7 and 12 = Limestone = ties = Corner fence W, 32,3 feet = N gal post 8 30,7 feet,

No 9 = Corner to Sects 7-12-13-18 = Limestone = ties = Cor fence N W 42 feet; Cor Hedge S W 41,3 feet; Box Elder 18 S S, 81,8 feet;

No 10 = 1/4 Sect. Corner between Sects 13 and 19 = Limestone = ties = Corner fence W 26,1 feet; Cor fence S, 80 feet; Box NW 47,8'

No 11 = Corner to Sects 18-19-13-24 = Limestone = ties = Cor Hedge S W 50,5 feet; Cor fence N E 48,8 feet; Cherry 12" S S 54,4 feet -

No 12 = 1/4 Sect. Corner between Sects 19-24-25-30 = Limestone = ties = Cor Hedge S W 41,9 feet; Cor Hedge N W 37,7 feet; Cor fence N E 39,9 feet;

No 13 = Corner to Sects 19-24-25-30 = Limestone = ties = Cor fence S E 37,6 feet; Cor fence N W 45 feet; Egalt post N W 44,2 feet; Box NW 47,8' N E 14 = 1/4 Sect. Corner between Sects 25-30-31-36 = Limestone = ties = Cor fence S E 37,6 feet; Cor fence S W 35 feet; Cor fence S E 34,6 feet

No 15 = Corner to Sects 25-30-31-36 = Limestone = ties = Cor fence S E 37,6 feet; Cor fence S W 44,2 feet; Egalt post N W 44,2 feet

No 16 = 1/4 Sect. Corner between Sects 31-36 = granite stone = ties = Cor fence N E 38 feet; Cor fence N W 41,2 feet;

No 17 = Corner to Sects 31-36 = Red granite = ties = Cor fence N E 38 feet; Cor fence N W 41,2 feet;

No 18 = 1/4 Sect. Corner between Sect 1-5-7-0 R 42 = 36-571-R 42 = Limestone = ties = Cor fence N E 28,9 feet; Cor fence N W 28,3 feet -

No 19 = Corner to Sects 35-36-1-2 = Corner not located.

No 20 = 1/4 Sect. Corner between Sects 2 and 35 = Corner not located.

No 21 Corner to Sects 34-35-2-3 = Limestone = ties = Hedge N 32,3 feet; Cor fence S, 80 feet;

No 22 = 1/4 Sect. Corner between Sects 3-34 = Limestone = ties = Cor fence N 30,7 feet; Cor fence S 27,6 feet;

No 23 = intersection of set line with S line of labor = corner not located.